

Bellagio cabling supplement

Typical Large Gate and Block Video System with
 Bellagio digital video call panels
 and ACTPro Fob system
 inc. Radio remote for a Vehicle gate

Notes

* Core size/number depends on the Maglock/Lock release fitted and if break glass monitor is required.

** Requires a 230V Mains connection.

All control equipment must be in secure indoor locations or enclosures.
 The minimum amount of cabling is shown, please allow for spares.

Cable types:

CAT5 - Catagory 5 or 5e unshielded cable containing 8 cores.
 Cables are CAT5 unshielded unless otherwise stated.

CAT5 STP - Catagory 5 or 5e shielded cable containing 8 cores and shield
 1.0mm² - 1.0mm² Cross sectional area mains cable, Flex or Twin and Earth.

Maximum of 300m cable distance between the furthest 2 points.




DO NOT USE ALARM CABLE

Manuals refered to:

bellagio Manual BG Digital (PD-280 Issue 1+)


bellissimo & Bellcall Manual BSSW Gate and block (PD-120 Issue 2+)

ACT-PRO Manuals

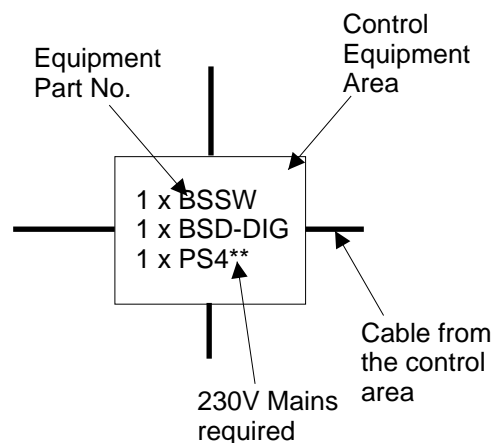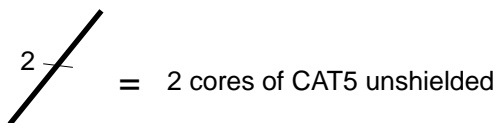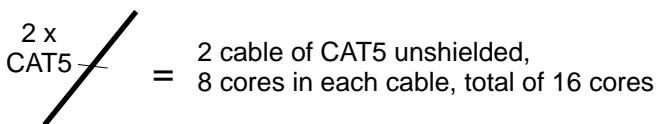

Video entrances and flats

Part 1

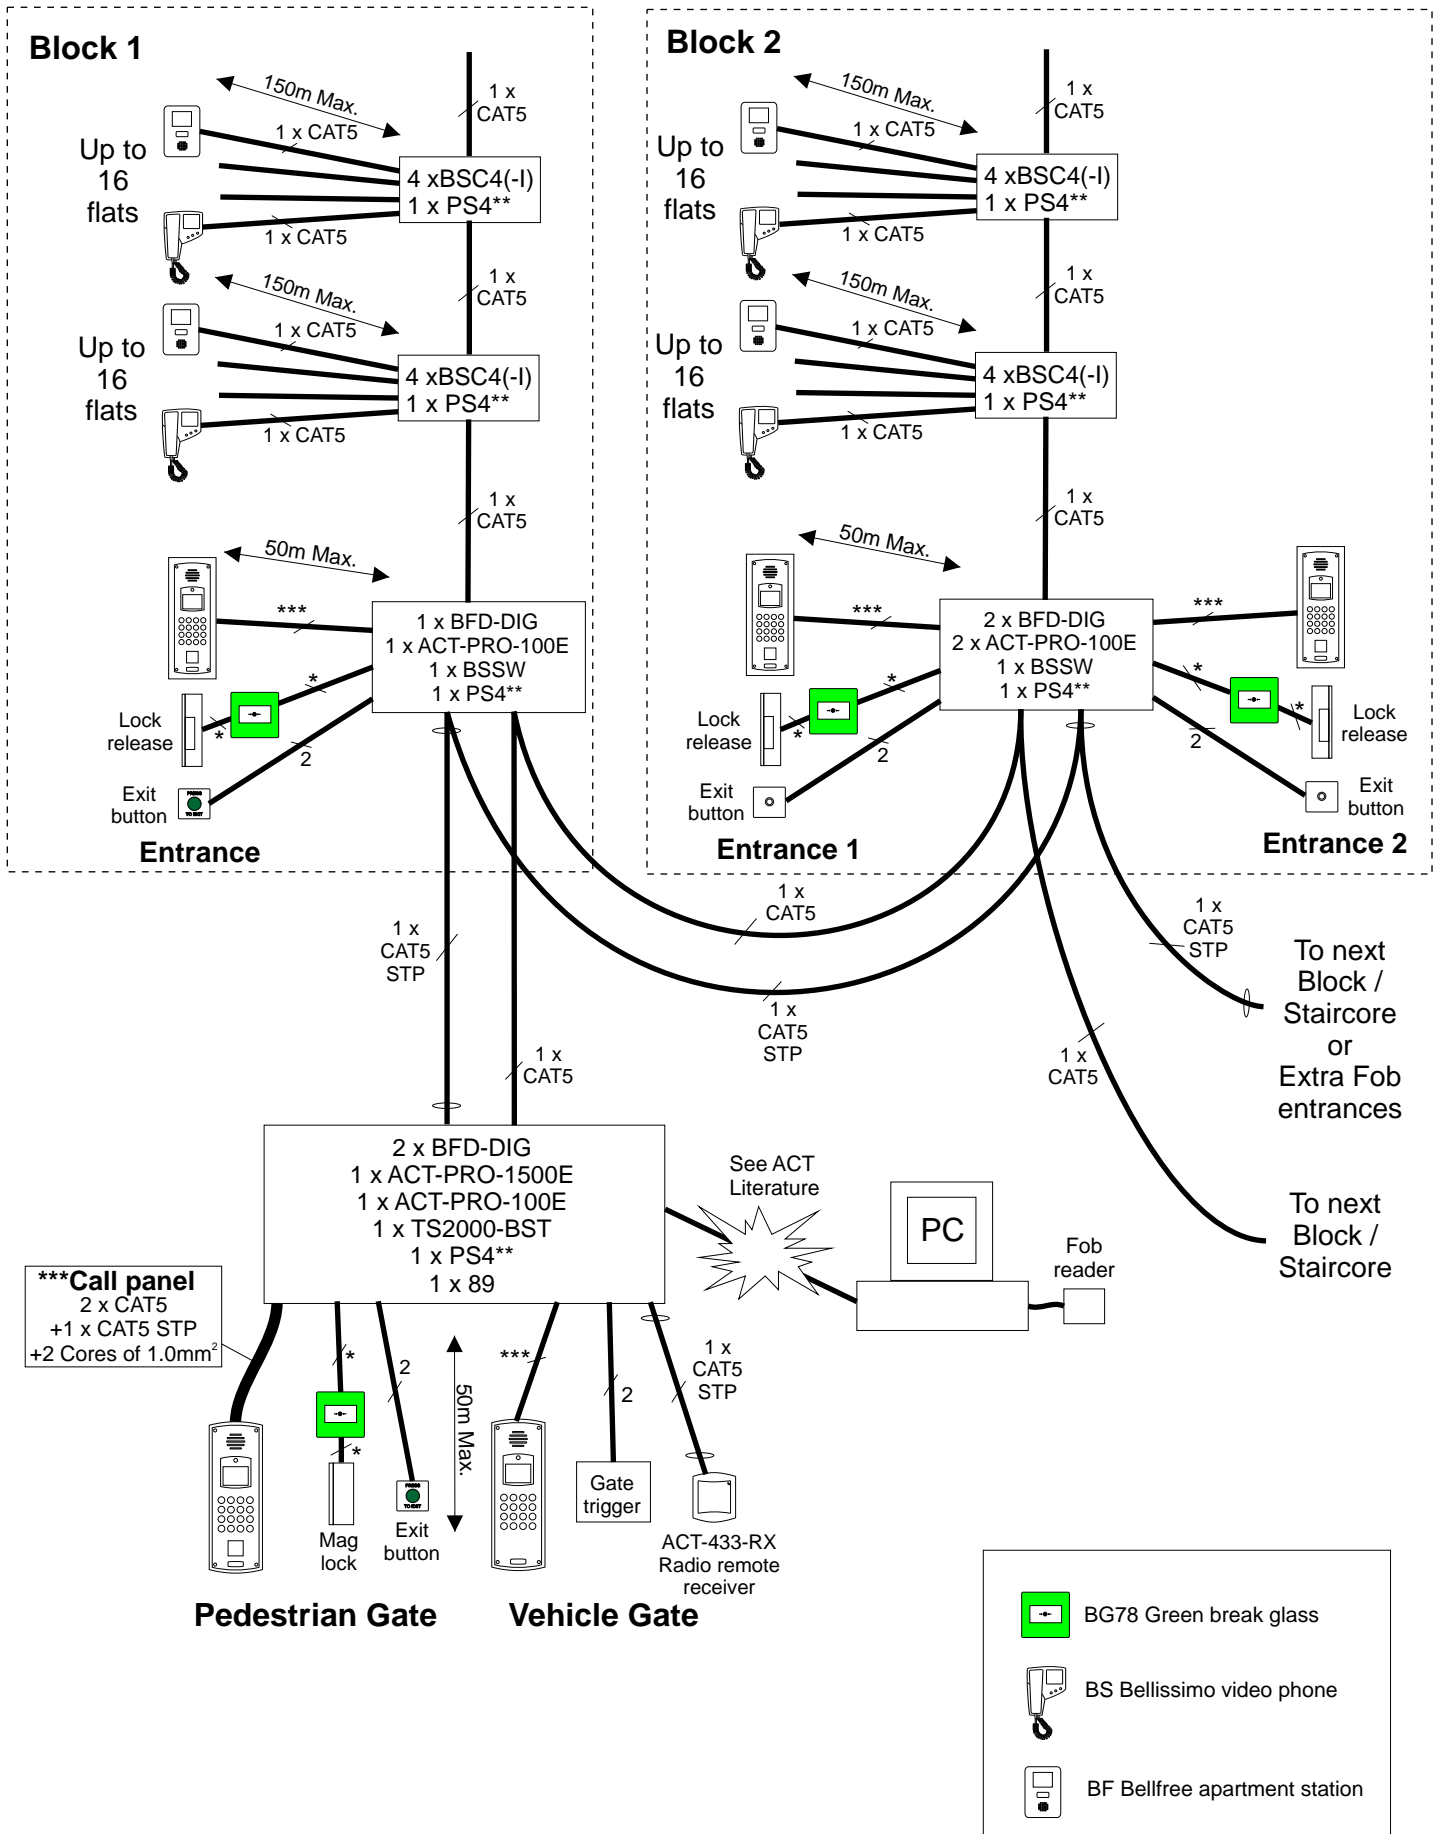

Bike, Bin or other Fob entrances Part 2

